

Polypropylene (PP) Capacitors for Pulse Applications with Metal Foil Electrodes, Schoopage Contacts and Self-Healing, Internal Series Connection for Increased Current Carrying Capability PCM 15 mm to 37.5 mm

Special Features

- High pulse duty
- Self-healing
- Internal series connection
- Very low dissipation factor
- Negative capacitance change versus temperature
- According to RoHS 2011/65/EU

Typical Applications

For high pulse and high frequency applications e.g.

- Switch mode power supplies
- Converter in drives and power electronics
- Deflection systems in monitors and TV-sets
- Electronic ballasts

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Aluminium foil and single-sided metallized plastic film

Internal construction:

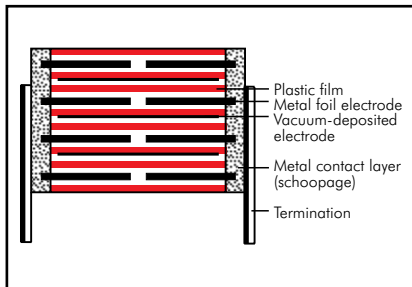

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Black.

Electrical Data

Capacitance range:

100 pF to 1.5 μF (E12-values on request)

Rated voltages:

400 VDC, 630 VDC, 1000 VDC, 1250 VDC, 1600 VDC, 2000 VDC

Capacitance tolerances:

±20%, ±10%, ±5% (other tolerances are available subject to special enquiry)

Operating temperature range:

-55° C to +100° C

Climatic test category:

55/100/56 in accordance with IEC

Insulation resistance at +20° C:

C ≤ 0.1 μF: ≥ 1 × 10⁵ MΩ

(mean value: 5 × 10⁵ MΩ)

C > 0.1 μF: ≥ 10 000 sec (MΩ × μF)

(mean value: 100 000 sec)

Measuring voltage: 100 V/1 min.

Dissipation factors at +20° C: tan δ

at f	C ≤ 0.1 μF	0.1 μF < C ≤ 1.0 μF	C > 1.0 μF
1 kHz	≤ 3 × 10 ⁻⁴	≤ 3 × 10 ⁻⁴	≤ 3 × 10 ⁻⁴
10 kHz	≤ 4 × 10 ⁻⁴	≤ 6 × 10 ⁻⁴	-
100 kHz	≤ 10 × 10 ⁻⁴	-	-

Maximum pulse rise time:

Capacitance pF/μF	max. pulse rise time V/μsec at T _A < 40° C					
	400 VDC	630 VDC	1000 VDC	1250 VDC	1600 VDC	2000 VDC
100 ... 220	27000	31000	33000	39000	39000	39000
330 ... 680	19000	21000	31000	34000	34000	39000
1000 ... 2200	13000	15000	27000	27000	27000	39000
3300 ... 6800	9000	14000	15000	17000	17000	21000
0.01 ... 0.022	7000	11000	11000	11000	11000	11000
0.033 ... 0.068	7000	9000	9000	9000	9000	9000
0.1 ... 0.22	7000	9000	9000	9000	9000	9000
0.33 ... 0.68	3000	5000	5000	5000	5000	-
1.0 ... 1.5	1000	1600	2000	-	-	-

for pulses equal to the rated voltage

Mechanical Tests

Pull test on pins:

d ≤ 0.8 φ: 10 N in direction of pins

d > 0.8 φ: 20 N in direction of pins

according to IEC 60068-2-21

Vibration:

6 hours at 10 ... 2000 Hz and 0.75 mm

displacement amplitude or 10 g in

accordance with IEC 60068-2-6

Low air density:

1 kPa = 10 mbar in accordance with

IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec²

in accordance with IEC 60068-2-29

Packing

Available taped and reeled up to and

including case size 15 x 26 x 31.5 /

PCM 27.5 mm.

Detailed taping information and graphs

at the end of the catalogue.

For further details and graphs please

refer to Technical Information.

Continuation

General Data

Capacitance	400 VDC/250 VAC*					630 VDC/350 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF	5	11	18	15	FKP4G001004B00_____	5	11	18	15	FKP4J001004B00_____
150 "	5	11	18	15	FKP4G001504B00_____	5	11	18	15	FKP4J001504B00_____
220 "	5	11	18	15	FKP4G002204B00_____	5	11	18	15	FKP4J002204B00_____
330 "	5	11	18	15	FKP4G003304B00_____	5	11	18	15	FKP4J003304B00_____
470 "	5	11	18	15	FKP4G004704B00_____	5	11	18	15	FKP4J004704B00_____
680 "	5	11	18	15	FKP4G006804B00_____	5	11	18	15	FKP4J006804B00_____
1000 pF	5	11	18	15	FKP4G011004B00_____	5	11	18	15	FKP4J011004B00_____
1500 "	5	11	18	15	FKP4G011504B00_____	5	11	18	15	FKP4J011504B00_____
2200 "	5	11	18	15	FKP4G012204B00_____	5	11	18	15	FKP4J012204B00_____
3300 "	5	11	18	15	FKP4G013304B00_____	5	11	18	15	FKP4J013304B00_____
4700 "	5	11	18	15	FKP4G014704B00_____	5	11	18	15	FKP4J014704B00_____
6800 "	5	11	18	15	FKP4G016804B00_____	5	11	18	15	FKP4J016804B00_____
0.01 μF	5	11	18	15	FKP4G021004B00_____	5	11	18	15	FKP4J021004B00_____
0.015 "	5	11	18	15	FKP4G021504B00_____	6	12.5	18	15	FKP4J021504C00_____
0.022 "	6	12.5	18	15	FKP4G022204C00_____	7	14	18	15	FKP4J022204D00_____
0.033 "	7	14	18	15	FKP4G023304D00_____	8	15	18	15	FKP4J023304F00_____
	5	14	26.5	22.5	FKP4G023305A00_____	6	15	26.5	22.5	FKP4J023305B00_____
0.047 "	8	15	18	15	FKP4G024704F00_____	9	16	18	15	FKP4J024704J00_____
	6	15	26.5	22.5	FKP4G024705B00_____	7	16.5	26.5	22.5	FKP4J024705D00_____
0.068 "	7	16.5	26.5	22.5	FKP4G026805D00_____	8.5	18.5	26.5	22.5	FKP4J026805F00_____
0.1 μF	8.5	18.5	26.5	22.5	FKP4G031005F00_____	10.5	19	26.5	22.5	FKP4J031005G00_____
						11	21	31.5	27.5	FKP4J031006B00_____
0.15 "	11	21	26.5	22.5	FKP4G031505I00_____	11	21	26.5	22.5	FKP4J031505I00_____
	9	19	31.5	27.5	FKP4G031506A00_____	11	21	31.5	27.5	FKP4J031506B00_____
0.22 "	11	21	31.5	27.5	FKP4G032206B00_____	13	24	31.5	27.5	FKP4J032206D00_____
0.33 "	13	24	31.5	27.5	FKP4G033306D00_____	15	26	31.5	27.5	FKP4J033306F00_____
0.47 "	17	29	31.5	27.5	FKP4G034706G00_____	17	34.5	31.5	27.5	FKP4J034706I00_____
0.68 "	17	34.5	31.5	27.5	FKP4G036806I00_____	20	39.5	41.5	37.5	FKP4J036807G00_____
1.0 μF	20	39.5	31.5	27.5	FKP4G041006J00_____	20	39.5	41.5	37.5	FKP4J041007G00_____
1.5 "	20	39.5	41.5	37.5	FKP4G041507G00_____	24	45.5	41.5	37.5	FKP4J041507H00_____


* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

∅ d	PCM
0.8	15 - 27.5
1.0	37.5



Part number completion:	
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 140.	

Rights reserved to amend design data without prior notification.

Continuation page 68

Continuation

General Data

Capacitance	1000 VDC/400 VAC*					1250 VDC/450 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
100 pF	5	11	18	15	FKP4O101004B00_____	5	11	18	15	FKP4R001004B00_____
150 "	5	11	18	15	FKP4O101504B00_____	5	11	18	15	FKP4R001504B00_____
220 "	5	11	18	15	FKP4O102204B00_____	5	11	18	15	FKP4R002204B00_____
330 "	5	11	18	15	FKP4O103304B00_____	5	11	18	15	FKP4R003304B00_____
470 "	5	11	18	15	FKP4O104704B00_____	5	11	18	15	FKP4R004704B00_____
680 "	5	11	18	15	FKP4O106804B00_____	5	11	18	15	FKP4R001684B00_____
1000 pF	5	11	18	15	FKP4O111004B00_____	5	11	18	15	FKP4R011004B00_____
1500 "	5	11	18	15	FKP4O111504B00_____	5	11	18	15	FKP4R011504B00_____
2200 "	5	11	18	15	FKP4O112204B00_____	5	11	18	15	FKP4R012204B00_____
3300 "	5	11	18	15	FKP4O113304B00_____	6	12.5	18	15	FKP4R013304C00_____
4700 "	5	11	18	15	FKP4O114704B00_____	7	14	18	15	FKP4R014704D00_____
6800 "	5	11	18	15	FKP4O116804B00_____	8	15	18	15	FKP4R016804F00_____
0.01 µF	6	12.5	18	15	FKP4O121004C00_____	9	16	18	15	FKP4R021004J00_____
	5	14	26.5	22.5	FKP4O121005A00_____	6	15	26.5	22.5	FKP4R021005B00_____
0.015 "	7	14	18	15	FKP4O121504D00_____	7	16.5	26.5	22.5	FKP4R021505D00_____
	6	15	26.5	22.5	FKP4O121505B00_____					
0.022 "	8	15	18	15	FKP4O122204F00_____	8.5	18.5	26.5	22.5	FKP4R022205F00_____
	6	15	26.5	22.5	FKP4O122205B00_____					
0.033 "	7	16.5	26.5	22.5	FKP4O123305D00_____	10.5	19	26.5	22.5	FKP4R023305G00_____
						9	19	31.5	27.5	FKP4R023306A00_____
0.047 "	8.5	18.5	26.5	22.5	FKP4O124705F00_____	11	21	31.5	27.5	FKP4R024706B00_____
	9	19	31.5	27.5	FKP4O124706A00_____					
0.068 "	11	21	26.5	22.5	FKP4O126805I00_____	13	24	31.5	27.5	FKP4R026806D00_____
	9	19	31.5	27.5	FKP4O126806A00_____					
0.1 µF	11	21	31.5	27.5	FKP4O131006B00_____	15	26	31.5	27.5	FKP4R031006F00_____
0.15 "	13	24	31.5	27.5	FKP4O131506D00_____	15	26	31.5	27.5	FKP4R031506F00_____
0.22 "	15	26	31.5	27.5	FKP4O132206F00_____	20	39.5	31.5	27.5	FKP4R032206J00_____
						17	29	41.5	37.5	FKP4R032207E00_____
0.33 "	17	34.5	31.5	27.5	FKP4O133306I00_____	19	32	41.5	37.5	FKP4R033307F00_____
	17	29	41.5	37.5	FKP4O133307E00_____					
0.47 "	19	32	41.5	37.5	FKP4O134707F00_____	20	39.5	41.5	37.5	FKP4R034707G00_____
0.68 "	20	39.5	41.5	37.5	FKP4O136807G00_____	24	45.5	41.5	37.5	FKP4R036807H00_____
1.0 µF	24	45.5	41.5	37.5	FKP4O141007H00_____					

* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:

Tolerance: 20 % = M
10 % = K
5 % = J

Packing: bulk = S
Pin length: 6-2 = SD

Taped version see page 140.

Rights reserved to amend design data without prior notification.

Continuation page 69

Continuation

General Data

Capacitance	1600 VDC/500 VAC*					2000 VDC/550 VAC*																		
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number														
100 pF	5	11	18	15	FKP4T001004B00	5	11	18	15	FKP4U001004B00														
150 "	5	11	18	15	FKP4T001504B00	5	11	18	15	FKP4U001504B00														
220 "	5	11	18	15	FKP4T002204B00	5	11	18	15	FKP4U002204B00														
330 "	5	11	18	15	FKP4T003304B00	5	11	18	15	FKP4U003304B00														
470 "	5	11	18	15	FKP4T004704B00	5	11	18	15	FKP4U004704B00														
680 "	5	11	18	15	FKP4T006804B00	5	11	18	15	FKP4U006804B00														
1000 pF	5	11	18	15	FKP4T011004B00	5	11	18	15	FKP4U011004B00														
1500 "	5	11	18	15	FKP4T011504B00	6	12.5	18	15	FKP4U011504C00														
2200 "	6	12.5	18	15	FKP4T012204C00	7	14	18	15	FKP4U012204D00														
3300 "	7	14	18	15	FKP4T013304D00	9	16	18	15	FKP4U013304J00														
4700 "	8	15	18	15	FKP4T014704F00	6	15	26.5	22.5	FKP4U013305B00														
6800 "	9	16	18	15	FKP4T016804J00	7	16.5	26.5	22.5	FKP4U014705D00														
	6	15	26.5	22.5	FKP4T016805B00	8.5	18.5	26.5	22.5	FKP4U016805F00														
0.01 μF	6	15	26.5	22.5	FKP4T021005B00	10.5	19	26.5	22.5	FKP4U021005G00														
0.015 "	8.5	18.5	26.5	22.5	FKP4T021505F00	11	21	26.5	22.5	FKP4U021505I00														
0.022 "	10.5	19	26.5	22.5	FKP4T022205H00	9	19	31.5	27.5	FKP4U021506A00														
0.033 "	9	19	31.5	27.5	FKP4T022206A00	11	21	31.5	27.5	FKP4U022206B00														
0.047 "	11	21	31.5	27.5	FKP4T023306B00	11	22	41.5	37.5	FKP4U022207B00														
0.068 "	13	24	31.5	27.5	FKP4T024706D00	13	24	31.5	27.5	FKP4U023306D00														
	15	26	31.5	27.5	FKP4T026806F00	13	24	41.5	37.5	FKP4U023307C00														
						15	26	31.5	27.5	FKP4U024706F00														
						15	26	41.5	37.5	FKP4U024707D00														
						17	34.5	31.5	27.5	FKP4U026806I00														
						17	29	41.5	37.5	FKP4U026807E00														
0.1 μF	17	34.5	31.5	27.5	FKP4T031006I00	19	32	41.5	37.5	FKP4U031007F00														
0.15 "	20	39.5	31.5	27.5	FKP4T031506J00	24	45.5	41.5	37.5	FKP4U031507H00														
	17	29	41.5	37.5	FKP4T031507E00	Dims. in mm. <table border="1" style="margin-left: 20px;"> <thead> <tr> <th colspan="2">Part number completion:</th> </tr> </thead> <tbody> <tr> <td>Tolerance:</td> <td>20 % = M</td> </tr> <tr> <td></td> <td>10 % = K</td> </tr> <tr> <td></td> <td>5 % = J</td> </tr> <tr> <td>Packing:</td> <td>bulk = S</td> </tr> <tr> <td>Pin length:</td> <td>6-2 = SD</td> </tr> <tr> <td></td> <td>Taped version see page 140.</td> </tr> </tbody> </table>					Part number completion:		Tolerance:	20 % = M		10 % = K		5 % = J	Packing:	bulk = S	Pin length:	6-2 = SD		Taped version see page 140.
Part number completion:																								
Tolerance:	20 % = M																							
	10 % = K																							
	5 % = J																							
Packing:	bulk = S																							
Pin length:	6-2 = SD																							
	Taped version see page 140.																							
0.22 "	19	32	41.5	37.5	FKP4T032207F00																			
0.33 "	20	39.5	41.5	37.5	FKP4T033307G00																			
0.47 "	24	45.5	41.5	37.5	FKP4T034707H00																			


* AC voltage: $f \leq 1000 \text{ Hz}$; $1.4 \times U_{\text{rms}} + U_{\text{DC}} \leq U_r$

** PCM = Printed circuit module = pin spacing

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Rights reserved to amend design data without prior notification.

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide):

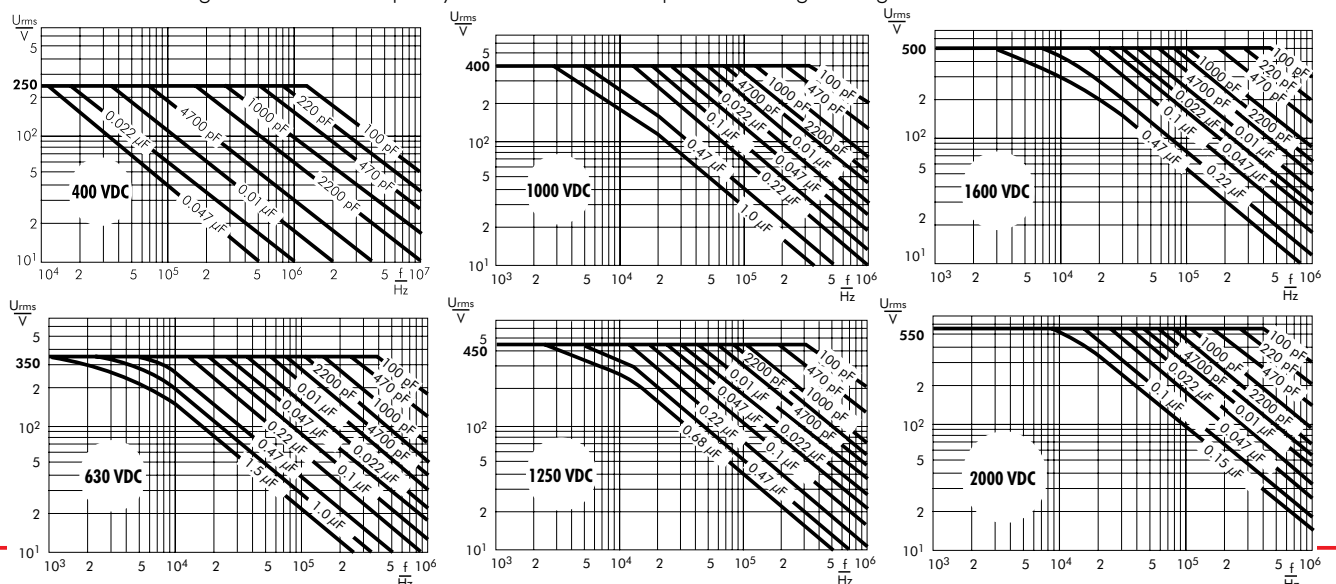

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{max.} \leq 125^{\circ}C$
soldering: $T_{max.} \leq 135^{\circ}C$

Polypropylene: preheating: $T_{max.} \leq 100^{\circ}C$
soldering: $T_{max.} \leq 110^{\circ}C$


Single wave soldering

Soldering bath temperature: $T < 260^{\circ}C$
Dwell time: $t < 5 \text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}C$
Dwell time: $\Sigma t < 5 \text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

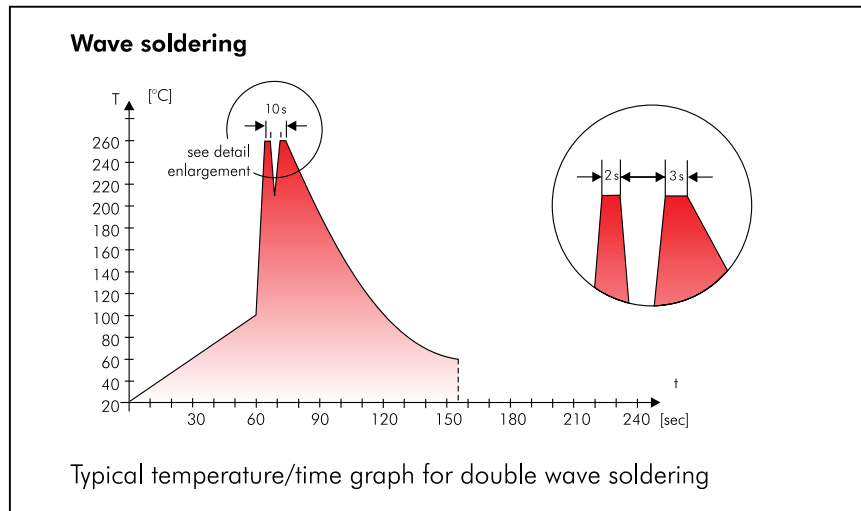

WIMA Quality and Environmental Philosophy

ISO 9001:2008 Certification

ISO 9001:2008 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2008 of our factories by the VDE inspectorate certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application of WPCS during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

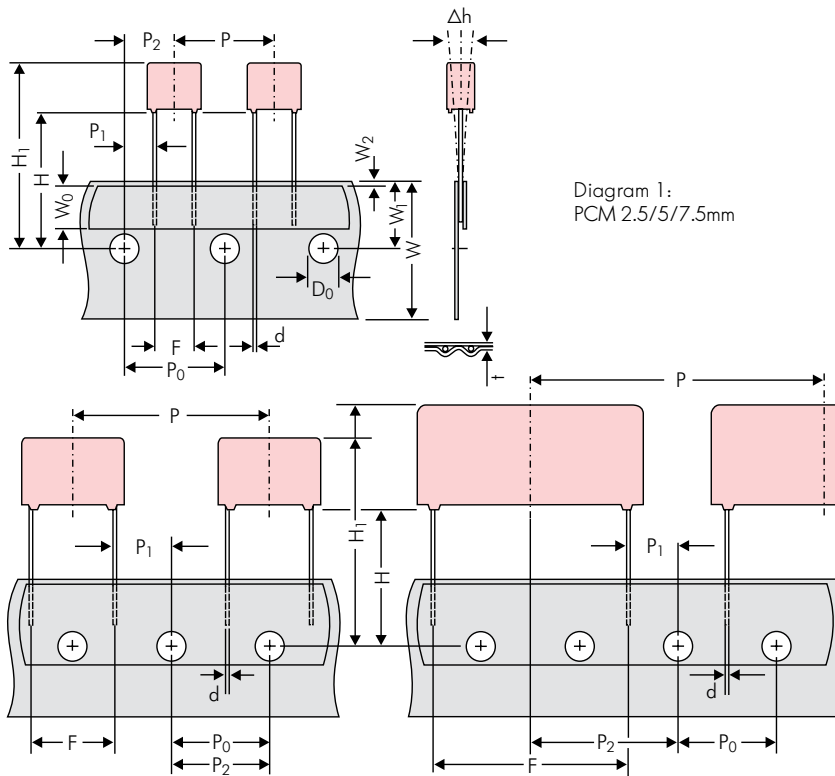


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm
*PCM 27.5 tapping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping									
		PCM 2.5 tapping	PCM 5 tapping	PCM 7.5 tapping	PCM 10 tapping*	PCM 15 tapping*	PCM 22.5 tapping	PCM 27.5 tapping			
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5			
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape			
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5			
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.			
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2			
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5			
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch			
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7			
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3			
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5			
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0			
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8			
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}			
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.			
Total tape thickness	t	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2			
Package (see also page 141)	ROLL/AMMO			AMMO							
	REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2	depending on comp. dimensions		REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2 or 66 ±2	REEL	φ 500 max. φ 25 ±1	B 60 ±2 68 ±2
Unit	see details page 142.										

Dims in mm.

* Diameter of pins see General Data.


* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 1). P₀ = 12.7 or 15.0 is possible


Please clarify customer-specific deviations with the manufacturer.

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging

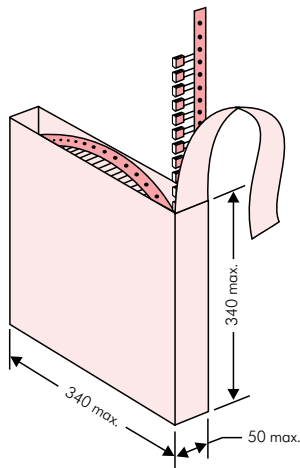

■ AMMO Packaging

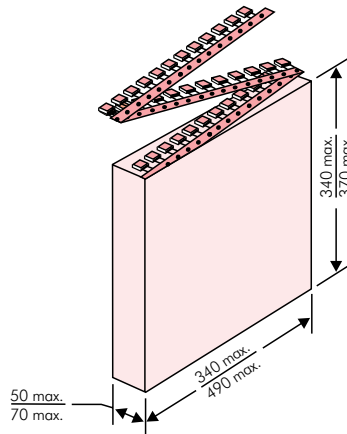

■ REEL Packaging

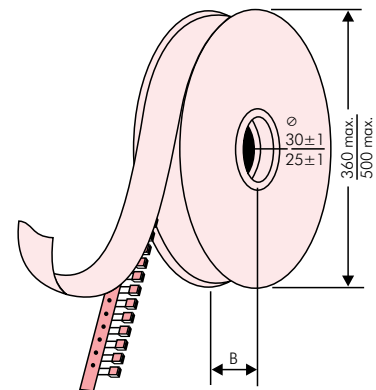

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

WIMA Best Capacitors Made in Germany		Werk Unna	
Supplier-ID: 123456789	RoHS 2011/65/EU	Date Code: 08.10.10	
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000	
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002	
		Gross Weight [g]: 1870	
WIMA Confirmation No.: 0001004053000100	WIMA Part No.: MKS2C034701C00K88D		
Handling Unit: MKS 2	QTY: 5.000	COO: DE	
	MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RMS		
1000067326	Standard 10% Loss - Standard	Drühte 6-2	Week 03/2011
	Vorlage Debitor Inland		

BARCODE „Code 39“



Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing unit								
						ROLL		REEL				AMMO		
	W	H	L	Codes		S	H16.5	H18.5	ø 360	ø 500	340 × 340	490 × 370		
					N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	0B	5000		2200	2500				2800		
	3	7.5	4.6	0C	5000		2000	2300				2300		
	3.8	8.5	4.6	0D	5000		1500	1800				1800		
	4.6	9	4.6	0E	5000		1200	1500				1500		
	5.5	10	4.6	0F	5000		900	1200				1200		
5 mm	2.5	6.5	7.2	1A	5000		2200	2500				2800		
	3	7.5	7.2	1B	5000		2000	2300				2300		
	3.5	8.5	7.2	1C	5000		1600	2000				2000		
	4.5	6	7.2	1D	6000		1300	1500				1500		
	4.5	9.5	7.2	1E	4000		1300	1500				1500		
	5	10	7.2	1F	3500		1100	1400				1400		
	5.5	7	7.2	1G	4000		1000	1200				1200		
	5.5	11.5	7.2	1H	2500		1000	1200				1200		
	6.5	8	7.2	1I	2500		800	1000				1000		
	7.2	8.5	7.2	1J	2500		700	1000				1000		
	7.2	13	7.2	1K	2000		700	950				1000		
	8.5	10	7.2	1L	2000		600	800				800		
	8.5	14	7.2	1M	1500		600	800				800		
11	16	7.2	1N	1000		500	600				400			
7.5 mm	2.5	7	10	2A	5000			2500	4400		2500			
	3	8.5	10	2B	5000			2200	4300		2300		4150	
	4	9	10	2C	4000			1700	3200		1700		3100	
	4.5	9.5	10.3	2D	3500			1500	2900		1400		2800	
	5	10.5	10.3	2E	3000			1300	2500		1300			
	5.7	12.5	10.3	2F	2000			1000	2200		1100			
	7.2	12.5	10.3	2G	1500			900	1800		1000			
10 mm	3	9	13	3A	3000			1100	2200				1900	
	4	8.5	13.5	FA	3000			900	1600				1450	
	4	9	13	3C	3000			900	1600				1450	
	4	9.5	13	3D	3000			900	1600				1400	
	5	10	13.5	FB	2000			700	1300				1200	
	5	11	13	3F	3000			700	1300				1200	
	6	12	13	3G	2400			550	1100				1000	
	6	12.5	13	3H	2400			550	1100				1000	
8	12	13	3I	2000			400	800				740		
15 mm	5	11	18	4B	2400			600	1200				1150	
	5	13	19	FC	1000			600	1200				1200	
	6	12.5	18	4C	2000			500	1000				1000	
	6	14	19	FD	1000			500	1000				1000	
	7	14	18	4D	1600			450	900				850	
	7	15	19	FE	1000			450	900				850	
	8	15	18	4F	1200			400	800				740	
	8	17	19	FF	500			400	800				740	
	9	14	18	4H	1200			350	700				650	
	9	16	18	4J	900			350	700				650	
	10	18	19	FG	500			300	650				590	
11	14	18	4M	1000			300	600				540		
22.5 mm	5	14	26.5	5A	1200				800				770	
	6	15	26.5	5B	1000				700				640	
	7	16.5	26.5	5D	760				600				550	
	8	20	28	FH	500				500				480	
	8.5	18.5	26.5	5F	500				480				450	
	10	22	28	FI	540*				420				380	
	10.5	19	26.5	5G	680*				400				360	
	10.5	20.5	26.5	5H	680*				400				360	
	11	21	26.5	5I	680*				380				350	
	12	24	28	FJ	450*				350				310	

* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit											
						ROLL		REEL				AMMO					
	W	H	L	Codes		S	N	O	ø 360		ø 500		340 × 340		490 × 370		
								H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5
								F	I	H	J	A	C	B	D		
27.5 mm	9	19	31.5	6A	640*	–	–	–	–	460/340*	–	–	–	–	–	–	–
	11	21	31.5	6B	544*	–	–	–	–	380/280*	–	–	–	–	–	–	–
	13	24	31.5	6D	448*	–	–	–	–	300	–	–	–	–	–	–	–
	13	25	33	6K	336*	–	–	–	–	–	–	–	–	–	–	–	–
	15	26	31.5	6F	384*	–	–	–	–	270	–	–	–	–	–	–	–
	15	26	33	6L	288*	–	–	–	–	–	–	–	–	–	–	–	–
	17	29	31.5	6G	176*	–	–	–	–	–	–	–	–	–	–	–	–
	17	34.5	31.5	6I	176*	–	–	–	–	–	–	–	–	–	–	–	–
	20	32	33	6M	216*	–	–	–	–	–	–	–	–	–	–	–	–
	20	39.5	31.5	6J	144*	–	–	–	–	–	–	–	–	–	–	–	–
37.5 mm	9	19	41.5	7A	480*	–	–	–	–	–	–	–	–	–	–	–	–
	11	22	41.5	7B	408*	–	–	–	–	–	–	–	–	–	–	–	–
	13	24	41.5	7C	252*	–	–	–	–	–	–	–	–	–	–	–	–
	15	26	41.5	7D	144*	–	–	–	–	–	–	–	–	–	–	–	–
	17	29	41.5	7E	132*	–	–	–	–	–	–	–	–	–	–	–	–
	19	32	41.5	7F	108*	–	–	–	–	–	–	–	–	–	–	–	–
	20	39.5	41.5	7G	108*	–	–	–	–	–	–	–	–	–	–	–	–
	24	45.5	41.5	7H	84*	–	–	–	–	–	–	–	–	–	–	–	–
	27	15	41.5	7M	100*	–	–	–	–	–	–	–	–	–	–	–	–
	31	46	41.5	7I	72*	–	–	–	–	–	–	–	–	–	–	–	–
	35	50	41.5	7J	35*	–	–	–	–	–	–	–	–	–	–	–	–
	40	55	41.5	7K	28*	–	–	–	–	–	–	–	–	–	–	–	–
48.5 mm	19	31	56	8D	50*	–	–	–	–	–	–	–	–	–	–	–	–
	23	34	56	8E	72*	–	–	–	–	–	–	–	–	–	–	–	–
	27	37.5	56	8H	60*	–	–	–	–	–	–	–	–	–	–	–	–
	33	48	56	8J	48*	–	–	–	–	–	–	–	–	–	–	–	–
	37	54	56	8L	25*	–	–	–	–	–	–	–	–	–	–	–	–
52.5 mm	35	50	57	9F	25*	–	–	–	–	–	–	–	–	–	–	–	–
	45	55	57	9H	20*	–	–	–	–	–	–	–	–	–	–	–	–
	45	65	57	9J	20*	–	–	–	–	–	–	–	–	–	–	–	–

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



WIMA Part Number System

A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2		-		20%	bulk	6-2		

<p>Type description:</p> <p>SMD-PET = SMDT SMD-PEN = SMDN SMD-PPS = SMDI FKP 02 = FKPO MKS 02 = MKS0 FKS 2 = FKS2 FKP 2 = FKP2 MKS 2 = MKS2 MKP 2 = MKP2 FKS 3 = FKS3 FKP 3 = FKP3 MKS 4 = MKS4 MKP 4 = MKP4 MKP 10 = MKP1 FKP 4 = FKP4 FKP 1 = FKP1 MKP-X2 = MKX2 MKP-X2 R = MKXR MKP-X1 R = MKX1 MKP-Y2 = MKY2 MP 3-X2 = MPX2 MP 3-X1 = MPX1 MP 3-Y2 = MPY2 MP 3R-Y2 = MPRY Snubber MKP = SNMP Snubber FKP = SNFP GTO MKP = GTOM DC-LINK MKP 3 = DCP3 DC-LINK MKP 4 = DCP4 DC-LINK MKP 4S = DCP5 DC-LINK MKP 5 = DCP5 DC-LINK MKP 6 = DCP6 DC-LINK HC = DCHC</p>	<p>Rated voltage:</p> <p>50 VDC = B0 63 VDC = C0 100 VDC = D0 250 VDC = F0 400 VDC = G0 450 VDC = H0 600 VDC = I0 630 VDC = J0 700 VDC = K0 800 VDC = L0 850 VDC = M0 900 VDC = N0 1000 VDC = O1 1100 VDC = P0 1200 VDC = Q0 1250 VDC = R0 1500 VDC = S0 1600 VDC = T0 2000 VDC = U0 2500 VDC = V0 3000 VDC = W0 4000 VDC = X0 6000 VDC = Y0 250 VAC = 0W 275 VAC = 1W 300 VAC = 2W 305 VAC = AW 400 VAC = 3W 440 VAC = 4W 500 VAC = 5W ...</p>	<p>Capacitance:</p> <p>22 pF = 0022 47 pF = 0047 100 pF = 0100 150 pF = 0150 220 pF = 0220 330 pF = 0330 470 pF = 0470 680 pF = 0680 1000 pF = 1100 1500 pF = 1150 2200 pF = 1220 3300 pF = 1330 4700 pF = 1470 6800 pF = 1680 0.01 µF = 2100 0.022 µF = 2220 0.047 µF = 2470 0.1 µF = 3100 0.22 µF = 3220 0.47 µF = 3470 1 µF = 4100 2.2 µF = 4220 4.7 µF = 4470 10 µF = 5100 22 µF = 5220 47 µF = 5470 100 µF = 6100 220 µF = 6220 1000 µF = 7100 1500 µF = 7150 ...</p>	<p>Size:</p> <p>4.8x3.3x3 Size 1812 = KA 4.8x3.3x4 Size 1812 = KB 5.7x5.1x3.5 Size 2220 = QA 5.7x5.1x4.5 Size 2220 = QB 7.2x6.1x3 Size 2824 = TA 7.2x6.1x5 Size 2824 = TB 10.2x7.6x5 Size 4030 = VA 12.7x10.2x6 Size 5040 = XA 15.3x13.7x7 Size 6054 = YA 2.5x7x4.6 PCM 2.5 = 0B 3x7.5x4.6 PCM 2.5 = 0C 2.5x6.5x7.2 PCM 5 = 1A 3x7.5x7.2 PCM 5 = 1B 2.5x7x10 PCM 7.5 = 2A 3x8.5x10 PCM 7.5 = 2B 3x9x13 PCM 10 = 3A 4x9x13 PCM 10 = 3C 5x11x18 PCM 15 = 4B 6x12.5x18 PCM 15 = 4C 5x14x26.5 PCM 22.5 = 5A 6x15x26.5 PCM 22.5 = 5B 9x19x31.5 PCM 27.5 = 6A 11x21x31.5 PCM 27.5 = 6B 9x19x41.5 PCM 37.5 = 7A 11x22x41.5 PCM 37.5 = 7B 19x31x56 PCM 48.5 = 8D 35x50x57 PCM 52.5 = 9F ...</p>	<p>Tolerance:</p> <p>±20% = M ±10% = K ±5% = J ±2.5% = H ±1% = E ...</p> <p>Packing:</p> <p>AMMO H16.5 340x340 = A AMMO H16.5 490x370 = B AMMO H18.5 340x340 = C AMMO H18.5 490x370 = D REEL H16.5 360 = F REEL H16.5 500 = H REEL H18.5 360 = I REEL H18.5 500 = J ROLL H16.5 = N ROLL H18.5 = O BLISTER W12 180 = P BLISTER W12 330 = Q BLISTER W16 330 = R BLISTER W24 330 = T Bulk/TPS Standard = S ...</p>
			<p>Version code:</p> <p>Standard = 00 Version A1 = 1A Version A1.1.1 = 1B Version A2 = 2A ...</p>	<p>Pin length (untaped)</p> <p>3.5 ±0.5 = C9 6-2 = SD 16 ±1 = P1 ...</p>

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.